

Service Manual

Amplifier

SU-V560

Stereo Integrated Amplifier



Color

(K)...Black Type

Area

Country Code	Area	Color
(E), (E5)	Continental Europe	(K)
(EB)	Great Britain	(K)
(EG)	F.R. Germany & Italy	(K)

SPECIFICATIONS (DIN 45 500)

■ AMPLIFIER SECTION

20 Hz~20 kHz continuous power output
both channels driven 2 × 60 W (8 Ω)
1 kHz continuous power output
both channels driven (THD: 1%) 2 × 70 W (8 Ω)
2 × 100 W (4 Ω)

63 Hz~12.5 kHz continuous power output
both channels driven (0.7%) 2 × 60 W (8 Ω)
2 × 90 W (4 Ω)

Total harmonic distortion (Power Amp Direct input)
rated power at 20 Hz~20 kHz 0.005 % (8 Ω)
0.0009 % (8 Ω)
0.002 % (4 Ω)
rated power at 1 kHz 0.005 % (8 Ω)
0.0009 % (8 Ω)
0.002 % (4 Ω)
half power at 20 Hz~20 kHz 0.005 % (8 Ω)
half power at 1 kHz 0.0009 % (8 Ω)
0.002 % (4 Ω)

Intermodulation distortion
rated power at 50 Hz: 7 kHz = 4:1, SMPTE, 8 Ω 0.007 %
Residual hum and noise 0.2 mV
Damping factor 60 (8 Ω), 30 (4 Ω)
Headphones output level and impedance 540 mV/330 Ω
Load impedance
A or B 4 Ω~16 Ω
A and B 8 Ω~16 Ω

Input sensitivity and impedance
PHONO MM 2.5 mV/47 kΩ
PHONO MC 170 μV/220 Ω
TUNER, CD, AUX, TAPE 1, TAPE 2/DAT 150 mV/22 kΩ
POWER AMP DIRECT 1 V/18 kΩ
Phono maximum input voltage (IHF '66, 1 kHz, RMS)
MM 160 mV
MC 12 mV

S/N
rated power (4 Ω)
PHONO MM 77 dB (IHF '66: 83 dB)
PHONO MC 64 dB (IHF '66: 64 dB, 250 μV)
TUNER, CD, AUX, TAPE 1, TAPE 2/DAT 97 dB (IHF '66: 100 dB)

POWER AMP DIRECT 106 dB (IHF '66: 115 dB)

−26 dB power (4 Ω)

PHONO MM 76 dB

PHONO MC 63 dB

TUNER, CD, AUX, TAPE 1, TAPE 2/DAT 84 dB

50 mW power (4 Ω)

PHONO MM 75 dB

PHONO MC 63 dB

TUNER, CD, AUX, TAPE 1, TAPE 2/DAT 78 dB

Frequency response
PHONO RIAA standard curve
±0.8 dB (30 Hz~15 kHz)

TUNER, CD, AUX, TAPE 1, TAPE 2/DAT
3 Hz~100 kHz (−3 dB)
+0 dB, −0.2 dB (20 Hz~20 kHz)

POWER AMP DIRECT
2 Hz~120 kHz (−3 dB)
+0 dB, −0.2 dB (20 Hz~20 kHz)

Tone controls
BASS 50 Hz, +10 dB, −10 dB
TREBLE 20 kHz, +10 dB, −10 dB
Loudness control (volume at −30 dB) 50 Hz, +9 dB


Output voltage
TAPE 1, TAPE 2/DAT REC OUT 150 mV
Channel balance, AUX 250 Hz~6,300 Hz ±1 dB
Channel separation, AUX 1 kHz 50 dB

■ GENERAL
Power consumption 520 W
Power Supply For Great Britain AC 50 Hz/60 Hz, 240 V
For others AC 50 Hz/60 Hz, 220 V
Dimensions (W × H × D) 430 × 125 × 320 mm
(16-15/16" × 4-15/16" × 12-5/8")
Weight 8.8 kg (19.36 lb.)

Notes:
1. Specifications are subject to change without notice.
Weight and dimensions are approximate.
2. Total harmonic distortion is measured by the digital spectrum analyzer.

Technics

Matsushita Electric Industrial Co., Ltd.
Central P.O. Box 288, Osaka 530-91, Japan

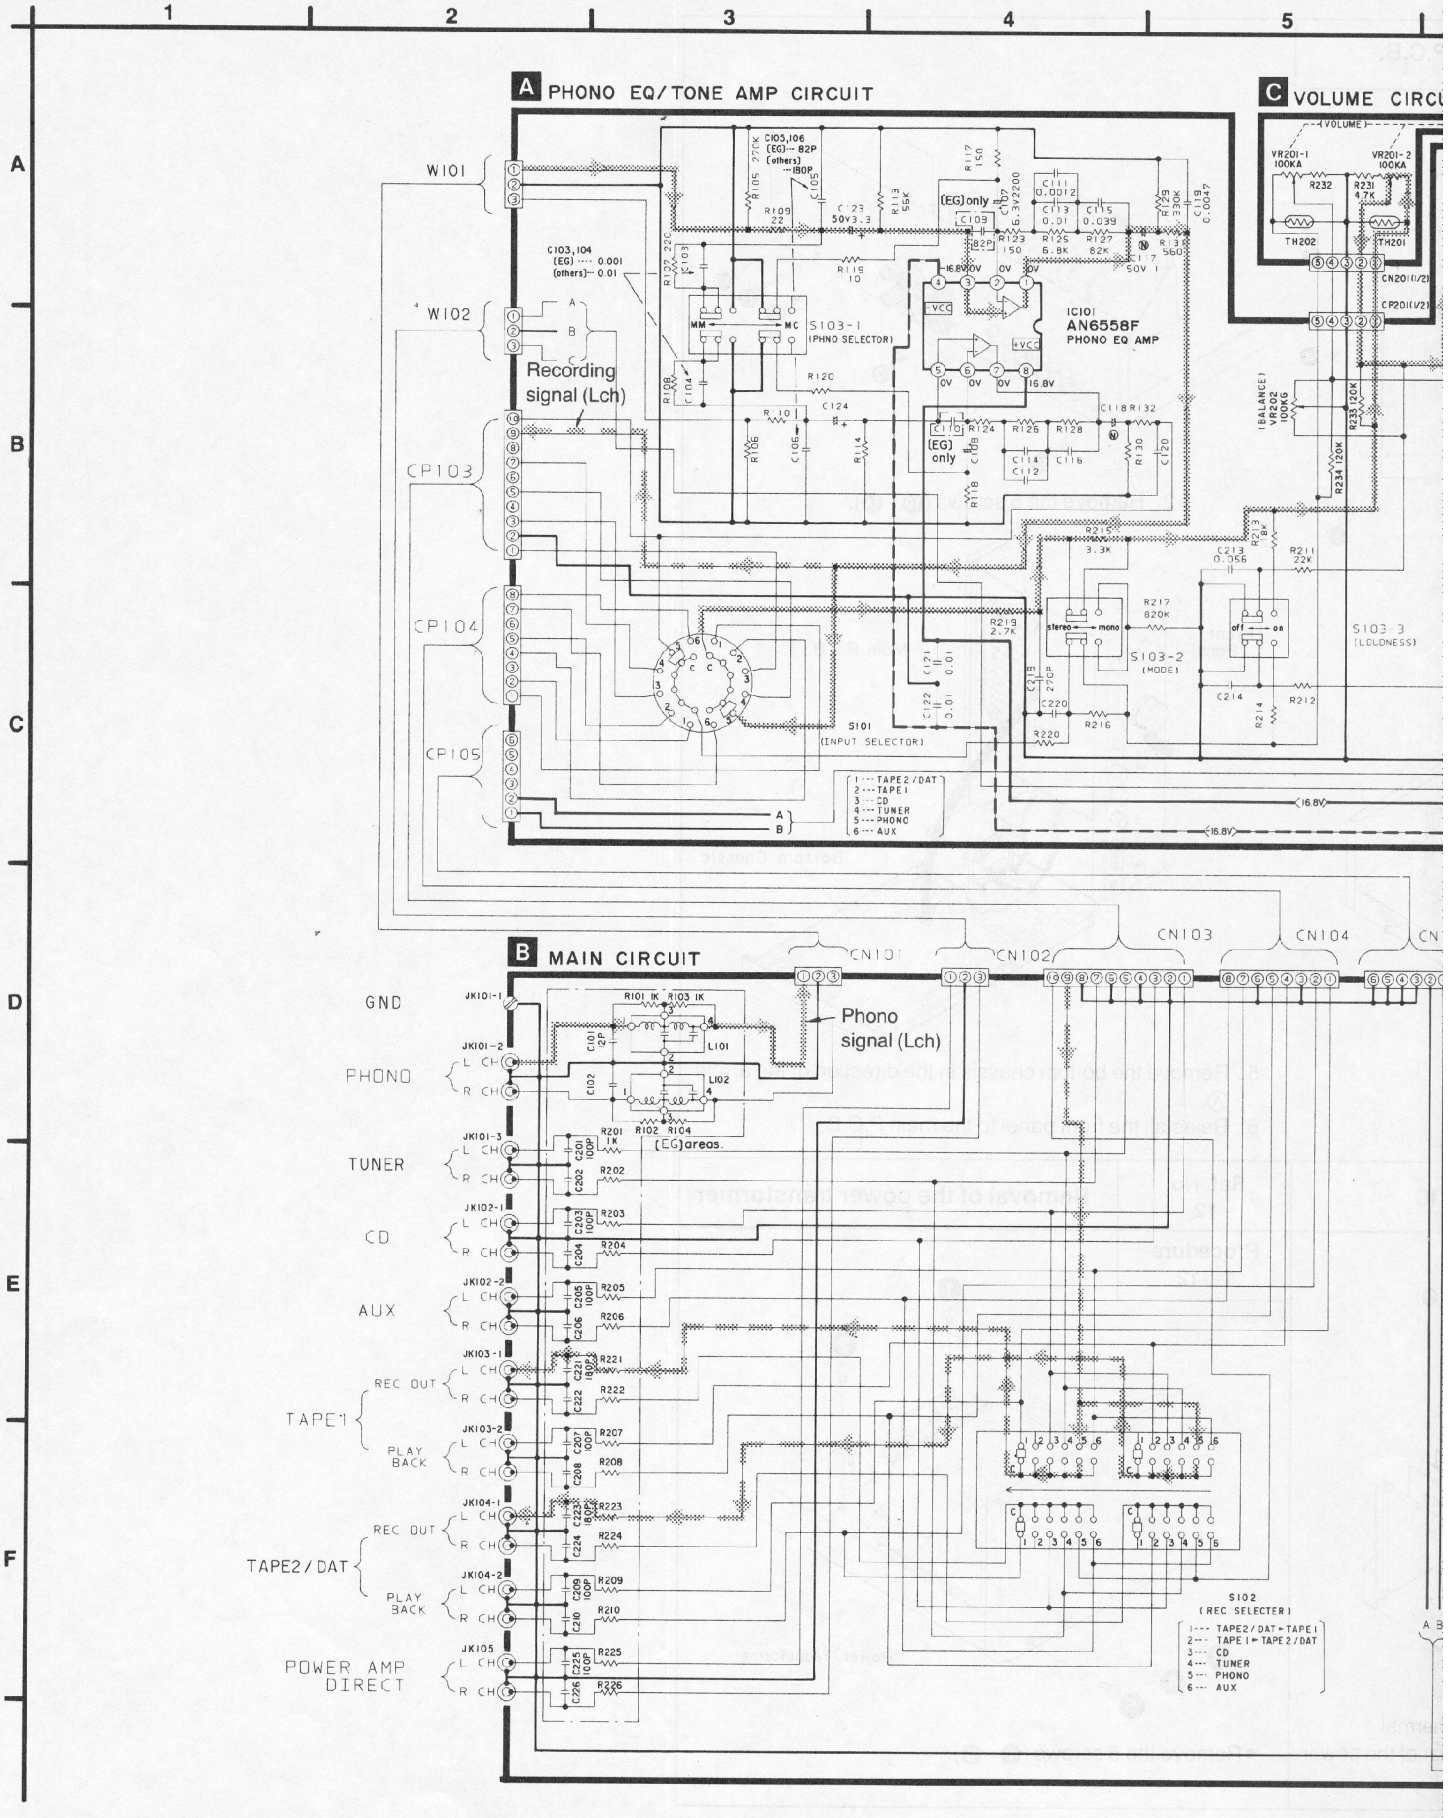

■ BLOCK DIAGRAM

