



## RECTIFIER DIODE, HYPERFAST

### DESCRIPTION



The UTC **BYC15-600** is a rectifier diode. It provides the designers with ultra-fast switching and low switching loss in associated MOSFET.

The UTC **BYC15-600** is suitable for half-bridge lighting ballasts, half-bridge/full-bridge switched mode power supplies and active power factor correction applications.

### FEATURES

- \* Low Reverse Recovery Current
- \* Ultra-Fast Switching
- \* Low Switching Loss in associated MOSFET
- \* Low Thermal Resistance

### SYMBOL

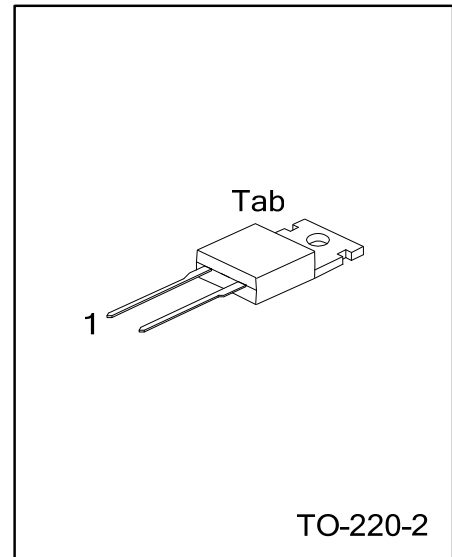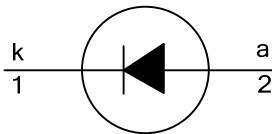

### ORDERING INFORMATION

Ordering Number		Package	Pin Assignment			Packing
Lead Free Plating	Halogen Free		1	2	Tab	
BYC15L-600-TA2-T	BYC15G-600-TA2-T	TO-220-2	K	A	K	Tube

Note: Pin Assignment: A: Anode, K: Cathode, Tab: Mounting Base

BYC15L-600-TA2-T (1)Packing Type (2)Package Type (3)Lead Free	(1) T: Tube (2) TA2: TO-220-2 (3) L: Lead Free, G: Halogen Free
--	---

### ■ ABSOLUTE MAXIMUM RATINGS

PARAMETER	SYMBOL	RATINGS	UNIT	
Peak Repetitive Reverse Voltage	$V_{RRM}$	600	V	
Crest Working Reverse Voltage	$V_{RWM}$	600	V	
Reverse Voltage	square-wave pulse; $\delta = 1.0$ ; $T_{Tab} \leq 100^{\circ}\text{C}$	$V_R$	500	V
Average Forward Current	square-wave pulse; $\delta = 0.5$ ; $T_{Tab} \leq 98^{\circ}\text{C}$	$I_{F(AV)}$	15	A
Repetitive Peak Forward Current	square-wave pulse; $\delta = 0.5$ ; $t_P = 25\mu\text{s}$ , $T_{Tab} \leq 98^{\circ}\text{C}$	$I_{FRM}$	30	A
Non-Repetitive Peak Forward Current.	$t_P = 10\text{ms}$ , sine-wave pulse;	$I_{FSM}$	200	A
			$t_P = 8.3\text{ms}$ , sine-wave pulse;	220
Junction Temperature	$T_J$	150	$^{\circ}\text{C}$	
Storage Temperature	$T_{STG}$	-40 ~ +150	$^{\circ}\text{C}$	

Note: Absolute maximum ratings are those values beyond which the device could be permanently damaged.

Absolute maximum ratings are stress ratings only and functional device operation is not implied.

### ■ THERMAL DATA

PARAMETER	SYMBOL	RATINGS	UNIT
Junction to Ambient	$\theta_{JA}$	60	K/W
Junction to Tab	$\theta_{JB}$	1.5	K/W

### ■ ELECTRICAL CHARACTERISTICS ( $T_J = 25^{\circ}\text{C}$ , unless otherwise specified)

PARAMETER	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT	
Forward Voltage	$V_F$	$I_F = 15\text{A}$ , $T_J = 150^{\circ}\text{C}$		1.32	2.03	V	
		$I_F = 30\text{A}$ , $T_J = 150^{\circ}\text{C}$		1.64	2.34	V	
		$I_F = 15\text{A}$		1.89	2.9	V	
Reverse Current	$I_R$	$V_R = 600\text{V}$		12	200	$\mu\text{A}$	
		$V_R = 500\text{V}$ , $T_J = 100^{\circ}\text{C}$		1.1	3.0	mA	
Reverse Recovery Time	$t_{RR}$	$I_F = 1\text{A}$ , $V_R = 30\text{V}$ , $dI_F/dt = 50\text{A}/\mu\text{s}$ (Figure1)		35	55	ns	
		$I_F = 15\text{A}$ , $V_R = 400\text{V}$ , $dI_F/dt = 500\text{A}/\mu\text{s}$ (Figure1)	$T_J = 25^{\circ}\text{C}$		19		ns
			$T_J = 100^{\circ}\text{C}$		32	40	ns
Peak Reverse Recovery Current	$I_{RM}$	$I_F = 15\text{A}$ , $V_R = 400\text{V}$ , $T_J = 125^{\circ}\text{C}$ (Figure1)	$dI_F/dt = 50\text{A}/\mu\text{s}$		3.0	7.5	A
			$dI_F/dt = 500\text{A}/\mu\text{s}$		9.5	12	A
Forward Recovery Voltage	$V_{FR}$	$I_F = 15\text{A}$ , $dI_F/dt = 100\text{A}/\mu\text{s}$ (Figure2)		8	11	V	

■ TYPICAL CHARACTERISTICS

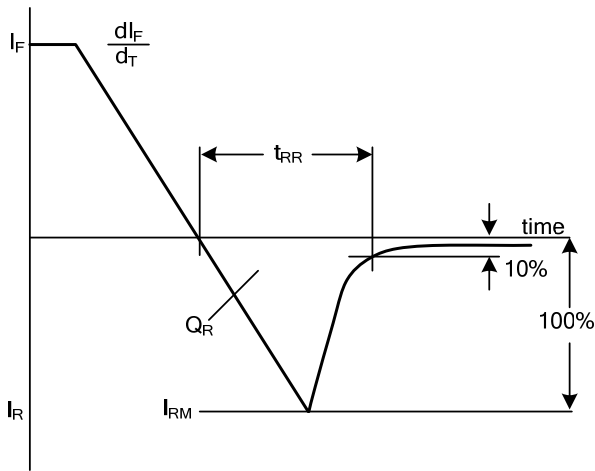


Fig 1. Reverse Recovery Definitions

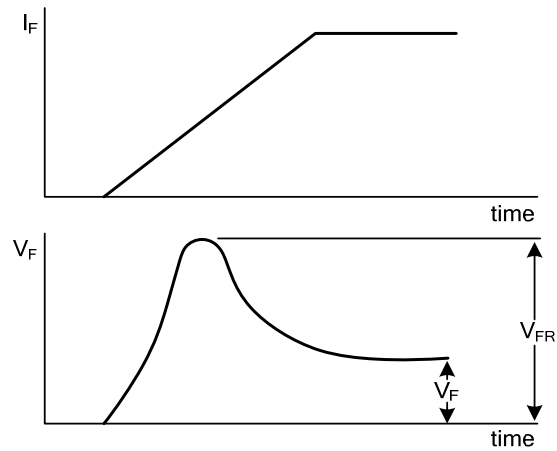


Fig 2. Forward Recovery Definitions

UTC assumes no responsibility for equipment failures that result from using products at values that exceed, even momentarily, rated values (such as maximum ratings, operating condition ranges, or other parameters) listed in products specifications of any and all UTC products described or contained herein. UTC products are not designed for use in life support appliances, devices or systems where malfunction of these products can be reasonably expected to result in personal injury. Reproduction in whole or in part is prohibited without the prior written consent of the copyright owner. The information presented in this document does not form part of any quotation or contract, is believed to be accurate and reliable and may be changed without notice.